

A COATING


Measured curve for StockOptics & BeamTuning

Material: Fused Silica

Wavelength: 400 - 600 nm

Date: 12.12.2018

Measuring Instrument: PerkinElmer UV WinLab Data Processor and Viewer Version 1.00.00

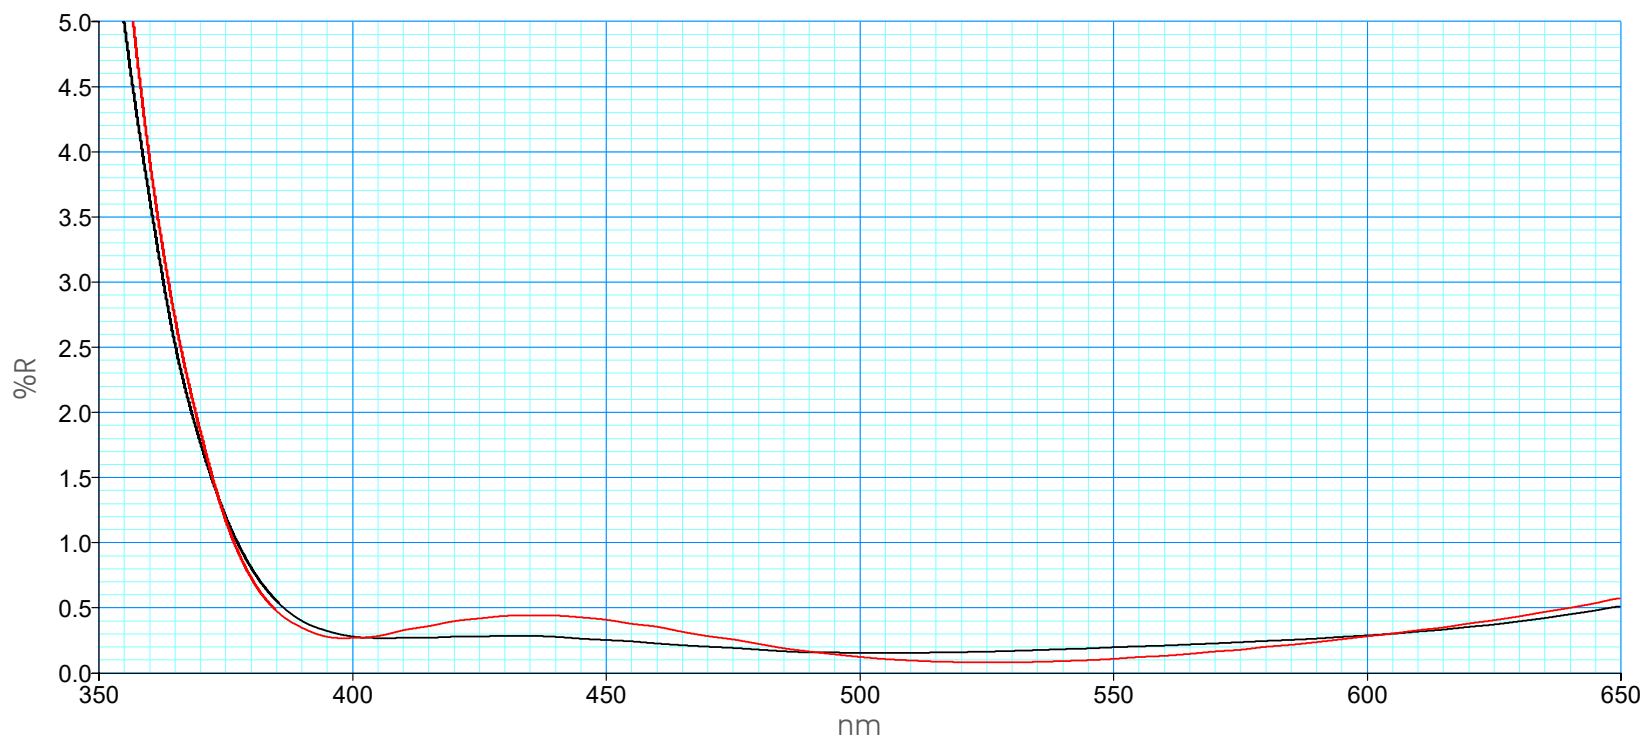

— 1 010302-021-03A; 010303-001-03A; 010306-021-03A; 010312-021-03A Run 4890/112/09 AOI 8°
 — 2 010302-021-03A; 010303-001-03A; 010306-021-03A; 010312-021-03A Run 4891/112/09 AOI 8°

asphericon GmbH

Stockholmer Str. 9 | 07747 Jena
Germany



+49 (0) 3641 - 3100 560



+49 (0) 3641 - 3100 561

asphericon, Inc.

2601 Cattlemen Road, Suite 301
Sarasota, FL 34232 | USA



+1 - 941 - 564 0890



sales@asphericon.com



www.asphericon.com

asphericon, s.r.o.

Milířská 449 | Jeřmanice 463 12
Czech Republic



+420 488 100 300