



StockOptics

CATALOG 2026 | Europe

Dear asphericon customer

Within the StockOptics product range, you can choose from an extensive portfolio of precision-polished aspheric lenses, acylinders and axicons. Benefit from outstanding asphericon quality at excellent conditions and fast delivery.

Discover, for example, the various quality levels of our aspheres: Precision, Ultra and BeamTuning. These aspheres are optimized for a wide range of applications, including high laser powers. In addition to further diameters, all fused silica aspheres are now available with V-Coatings (355 nm, 532 nm and 1064 nm). Learn more at page 10.

The new StockOptics catalog contains latest technical information and prices. Shop conveniently online or contact the asphericon sales team for professional support.



Product Range

asphericon's fine collection of aspheres, axicons, acylinders and mounted optics – profit from the technology leader in manufacturing high precision aspheres.

YOUR BENEFITS:

- = Precision polished StockOptics for remarkable performance
- = CNC grinding & polishing for superior surface roughness
- = High quality level for demanding applications
- = Off-the-shelf delivery for short lead times
- = Files for optical design and drawings available (Zemax, CodeV, OSLO, VirtualLab™, Step)



a|High-NA

Page 06



a|Low-NA

Page 08



a|FusedSilica

Page 10



a|Axicons

Page 14



a|Acylinders

Page 16



a|MountedAspheres/Axicons

Page 18

Quick Guide:

WHY TO CHOOSE AN ASPHERIC SOLUTION?

In comparison to spherical lenses our aspheres perform with minimal foci and show outstanding imaging characteristics (see fig. 1).

The quality of all StockOptics is sufficient for high-end applications. Within our BeamTuning line (see p. 13) we also offer diffraction-limited aspheric lenses. They generate an even better spot size (fig. 2).

Finally, both qualities convince with outstanding surface form deviations (fig. 3).


Choose all lenses out of this catalog and order online at asphericon.com. We also offer customized lenses and systems. For your individual solution please contact us!

Contact us:

✉ sales@asphericon.com


☎ +49 (0) 3641-31 00 560

fig. 1
1 Optical path / Spot size
Spherical lens vs. Aspheric lens¹
Dia: 25 mm | EFL: 20 mm | NA: 0.54

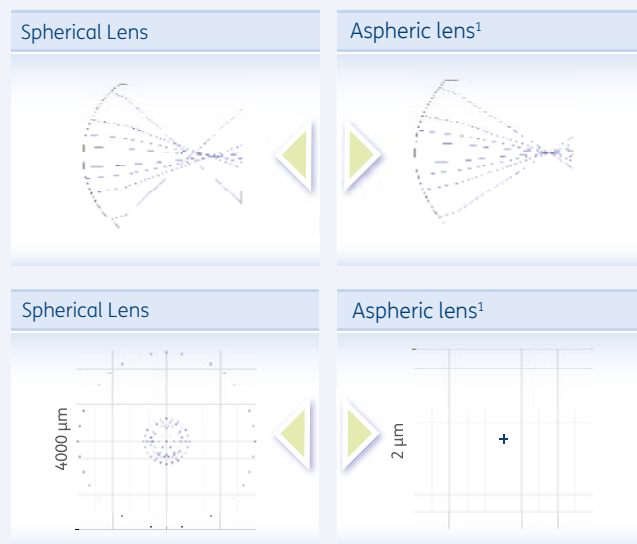


- = Spot sizes from both lenses differ significantly: 4000 µm (Sphere) vs. 2 µm (Asphere)
- = Spherical lenses produce improper foci and spherical aberrations
- = StockOptic lenses stand out with minimal foci to maximize intensity

fig. 2
2 Point spread function / Spot size
Aspheric lens¹ vs. BeamTuning lens²
Dia: 25 mm | EFL: 20 mm | NA: 0.54

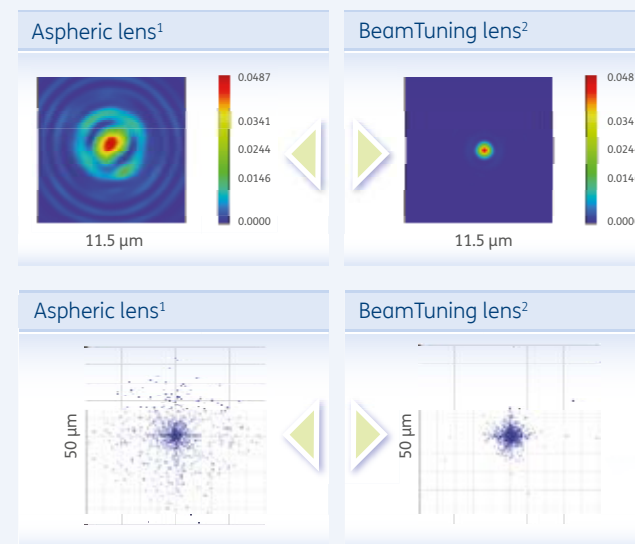

- = Wavefront RMS shows great result for both lenses (aspheric lens = 0.361 waves, BeamTuning lens = 0.065 waves)
- = BeamTuning lens performs with an excellent spot size and diffraction-limited focus (Strehl ratio: 0.85)

fig. 3
3 Surface form deviation
Aspheric lens¹ vs. BeamTuning lens²
Dia: 25 mm | EFL: 20 mm | NA: 0.54

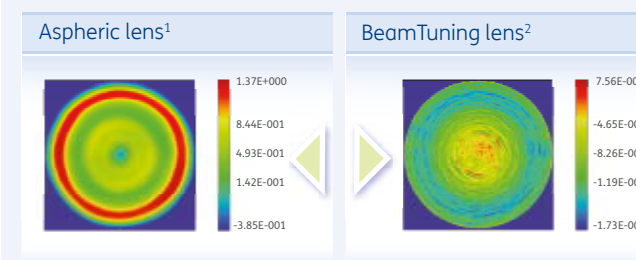

- = asphericon lens convinces with a $RMS_i \leq 0.5 \mu m$
- = Full-surface interferometric measurement shows an outstanding RMS_i of up to $0.02 \mu m$ for BeamTuning quality

1 asphericon AHL25-20 (see p. 06/07), design wavelength: 780 nm
2 BeamTuning lens (see p. 13), design wavelength: 355 nm

a|High-NA

Precision polished aspheres for a superior beam energy distribution. Especially suitable for your demanding laser applications. Also available as mounted lenses.

KEY BENEFITS

- = Outstanding surface form deviation of RMS, up to $\leq 0.1 \mu\text{m}$
- = Decrease of chromatic aberrations by use of low dispersion material
- = Available with 3 standard coatings (customized coatings on request)
- = Laser induced damage threshold: 12 J/cm^2 , 100 Hz, 6 ns, 532 nm
For higher laser power applications please request a V-Coating. Contact us for an individual offer.
- = Off-the-shelf delivery
- = RoHS compliance

LENS DESCRIPTION

EFL Tolerance	[%]	≤ 0.1
Surface Imperfections	[Scratch-Dig]	60-40
Diameter Tolerance	[mm]	+0/-0.05
Center Thickness Tolerance ¹	[mm]	± 0.05
Clear Aperture	[%]	≥ 90

AR-Coatings²

- A: $R_{\text{MAX}} < 1.0\%$, $R_{\text{AVG}} \leq 0.4\%$, 400-600 nm, AOI=0°
- B: $R_{\text{MAX}} < 1.0\%$, $R_{\text{AVG}} \leq 0.4\%$, 600-1050 nm, AOI=0°
- C: $R_{\text{MAX}} < 1.0\%$, $R_{\text{AVG}} \leq 0.4\%$, 1000-1500 nm, AOI=0°

PRECISION

Surface Form Deviation (RMS) ³				Wavefront RMS							
[μm]		≤0.5	[nm]		≤390						
Product Code	Ø	EFL	NA	f/d	WD	λ _{Design}	Material	Prices 1pc ⁴		Prices 5pc ⁴	
	[mm]	[mm]			[mm]	[nm]		uncoated	coated	uncoated	coated
AHL10-08-P ⁵	10	8	0.55	0.80	6.0	780	S-LAH64	153 €	179 €	148 €	173 €
AHL12-10-P	12.5	10	0.55	0.80	7.6	780	S-LAH64	178 €	204 €	172 €	198 €
AHL15-12-P	15	12	0.55	0.80	9.0	780	S-LAH64	191 €	217 €	185 €	210 €
AHL18-15-P	18	15	0.53	0.83	11.5	780	S-LAH64	204 €	240 €	198 €	232 €
AHL20-18-P	20	18	0.49	0.90	14.0	780	S-LAH64	217 €	251 €	210 €	243 €
AHL25-20-P	25	20	0.54	0.80	15.7	780	S-LAH64	229 €	262 €	222 €	254 €
AHL30-26-P	30	26	0.52	0.87	20.6	780	S-LAH64	293 €	336 €	284 €	326 €
AHL45-32-P	45	32	0.61	0.71	24.2	780	S-LAH64	383 €	478 €	371 €	464 €
AHL50-40-P	50	40	0.55	0.80	31.3	780	S-LAH64	386 €	432 €	374 €	419 €

ULTRA

Surface Form Deviation (RMS) ³				[μm]	≤0.1	Wavefront RMS			[nm]	≤78			
Product Code	Ø	EFL	NA	f/d	WD	λ _{Design}	Material	Prices 1pc ⁴		Prices 5pc ⁴		Prices Mounted 1pc ⁴	
	[mm]	[mm]			[mm]	[nm]		uncoated	coated	uncoated	coated	uncoated	coated
AHL10-08-U ⁵	10	8	0.55	0.80	6.0	780	S-LAH64	305 €	356 €	296 €	345 €	-	-
AHL12-10-U	12.5	10	0.55	0.80	7.6	780	S-LAH64	357 €	407 €	346 €	394 €	455 €	500 €
AHL15-12-U	15	12	0.55	0.80	9.0	780	S-LAH64	382 €	434 €	370 €	421 €	477 €	534 €
AHL18-15-U	18	15	0.53	0.83	11.5	780	S-LAH64	408 €	480 €	395 €	465 €	506 €	577 €
AHL20-18-U	20	18	0.49	0.90	14.0	780	S-LAH64	433 €	500 €	420 €	484 €	531 €	595 €
AHL25-20-U	25	20	0.54	0.80	15.7	780	S-LAH64	459 €	526 €	445 €	510 €	557 €	624 €
AHL30-26-U	30	26	0.52	0.87	20.6	780	S-LAH64	587 €	675 €	569 €	654 €	-	-
AHL45-32-U	45	32	0.61	0.71	24.2	780	S-LAH64	767 €	956 €	743 €	926 €	-	-
AHL50-40-U	50	40	0.55	0.80	31.3	780	S-LAH64	771 €	866 €	748 €	840 €	-	-

1 For lenses AHL45-32, AHL50-40 please consider a center thickness tolerance of ± 0.1 . | 2 Custom coatings available upon request. | 3 RMS, corresponds to ISO 10110-5. | 4 Prices valid per piece. More volumes and discounts of coated and uncoated lenses on request. | 5 Calculated for 250 μm cover glass thickness. | General: Technical parameters and prices are subject to change without prior notice.

a|Low-NA

Available in a focal length-diameter-ratio (f/d) of 2.0 and ideally suited for light collection and laser applications. Some diameters are also available with high-precision mountings.

KEY BENEFITS

- = Outstanding surface form deviation up to $RMS_s \leq 0.1 \mu m$
- = Long focal length (f/d 2.0)
- = Available with 3 standard coatings (customized coatings on request)
- = Laser induced damage threshold: $12 J/cm^2$, 100 Hz, 6 ns, 532 nm
For higher laser power applications please request a V-Coating. Contact us for an individual offer.
- = Off-the-shelf delivery
- = RoHS compliance

LENS DESCRIPTION

EFL Tolerance	[%]	≤ 0.1
Surface Imperfections	[Scratch-Dig]	60-40
Diameter Tolerance	[mm]	+0/-0.05
Center Thickness Tolerance ¹	[mm]	± 0.05
Clear Aperture	[%]	≥ 90

AR-Coatings²

A: $R_{MAX} < 1.0\%$, $R_{AVG} \leq 0.4\%$, 400-600 nm, AOI=0°

B: $R_{MAX} < 1.0\%$, $R_{AVG} \leq 0.4\%$, 600-1050 nm, AOI=0°

C: $R_{MAX} < 1.0\%$, $R_{AVG} \leq 0.4\%$, 1000-1500 nm, AOI=0°

PRECISION

Surface Form Deviation (RMS) _s ³			[μm]	≤0.5	Wavefront RMS			[nm]	≤255		
Product Code	Ø	EFL	NA	f/d	WD	λ _{Design}	Material	Prices 1pc ⁴		Prices 5pc ⁴	
	[mm]	[mm]			[mm]	[nm]		uncoated	coated	uncoated	coated
ALL12-25-P	12.5	25	0.23	2.0	22.4	780	N-BK7	178 €	204 €	172 €	198 €
ALL25-50-P	25	50	0.23	2.0	46.0	780	N-BK7	229 €	262 €	222 €	254 €
ALL50-100-P	50	100	0.24	2.0	93.4	780	N-BK7	397 €	525 €	385 €	509 €
ALL75-60-P	75	60	0.62	0.8	36.5	780	N-BK7	678 €	875 €	657 €	848 €
ALL75-150-P	75	150	0.23	2.0	140.1	780	N-BK7	678 €	875 €	657 €	848 €
ALL100-100-P	100	100	0.48	1.0	76.2	780	N-BK7	971 €	1.326 €	941 €	1.285 €
ALL100-200-P	100	200	0.23	2.0	187.4	780	N-BK7	971 €	1.326 €	941 €	1.285 €

ULTRA

Surface Form Deviation (RMS) _s ³			[μm]		≤ 0.1		Wavefront RMS			[nm]		≤ 51	
Product Code	Ø ⁶	EFL	NA	f/d	WD	λ_{Design}	Material	Prices 1pc ⁴		Prices 5pc ⁴		Prices Mounted 1pc ⁵	
	[mm]	[mm]			[mm]	[nm]		uncoated	coated	uncoated	coated	uncoated	coated
ALL12-25-U	12.5	25	0.23	2.0	22.4	780	N-BK7	357 €	407 €	346 €	394 €	455 €	500 €
ALL25-50-U	25	50	0.23	2.0	46.0	780	N-BK7	459 €	526 €	445 €	510 €	557 €	624 €
ALL50-100-U	50	100	0.24	2.0	93.4	780	N-BK7	795 €	1.049 €	770 €	1.017 €	-	-

1 For lenses ALL50-100, ALL100-200 please consider a center thickness tolerance of ± 0.1 . For lenses ALL75-60, ALL100-100 please consider a center thickness tolerance of ± 0.15 . | 2 Custom coatings available upon request. | 3 For lenses ALL75-60, ALL75-150, ALL100-100, ALL100-200 please consider a maximum value of 0.75. RMS corresponding to ISO 10110-5 (surface form tolerances). | 4 Prices valid per piece. More volume discounts on request. | 5 Prices of mounted lenses valid per piece. More volumes and discounts of coated and uncoated mounted lenses on request. | 6 Other diameters on request. | General: Technical parameters and prices are subject to change without prior notice.



a|FusedSilica

Available in different quality levels and as mounted optics these lenses are optimized for high-power laser applications, as prototypes in test devices or standard components for beam focusing or collimation.

KEY BENEFITS

- = Outstanding surface form deviation (RMS_f up to ≤ 0.02 μm) and off-the-shelf delivery
- = High-end finished optics with lowest roughness (Rq ≤ 0.5 nm) for reduced scattering
- = Laser induced damage threshold: 12 J/cm², 100 Hz, 6 ns, 532 nm

LENS DESCRIPTION

EFL Tolerance	[%]	≤0.1
Surface Imperfections	[Scratch-Dig]	20-20
Diameter Tolerance	[mm]	+0/-0.05
Center Thickness Tolerance ¹	[mm]	±0.05
Clear Aperture	[%]	≥90

AR-Coatings

A: R_{MAX} < 1.0%, R_{AVG} ≤ 0.4%, 400-600 nm, AOI=0°
 B: R_{MAX} < 1.0%, R_{AVG} ≤ 0.4%, 600-1050 nm, AOI=0°
 C: R_{MAX} < 1.0%, R_{AVG} ≤ 0.4%, 1000-1500 nm, AOI=0°
 E: R_{MAX} < 1.0%, R_{AVG} ≤ 0.4%, 1500-1900 nm, AOI=0°
 F: R_{MAX} < 1.0%, R_{AVG} ≤ 0.4%, 1900-2100 nm, AOI=0°
 X: R_{MAX} < 1.0%, R_{AVG} ≤ 0.4%, 240-380 nm, AOI=0°
 Y: R_{MAX} < 1.0%, R_{AVG} ≤ 0.4%, 320-450 nm, AOI=0°

AR-HighPower-Coatings

K: R < 0.25%, 355 nm, AOI=0°
 L: R < 0.25%, 532 nm, AOI=0°
 M: R < 0.25%, 1064 nm, AOI=0°
 N: R < 0.25%, 266 nm, AOI=0°
 O: R < 0.25%, 632 nm, AOI=0°
 P: R < 0.25%, 780 nm, AOI=0°
 Q: R < 0.25%, 1550 nm, AOI=0°
 R: R < 0.25%, 2000 nm, AOI=0°



Aspheres with optimized design wavelengths, perfectly matching your UV application!

PRECISION

Surface Form Deviation (RMS) _f ²	[μm]	≤0.5
Wavefront RMS	[nm]	≤235

Product Code	Ø	EFL	NA	f/d	WD	λ _{Design}	Prices 1pc ³	
	[mm]	[mm]			[mm]	[nm]	uncoated	coated
AFL12-10-P	12.5	10	0.58	0.833	5.7	355	355 €	399 €
AFL12-15-P	12.5	15	0.39	1.2	12.3	285	326 €	372 €
AFL12-20-P	12.5	20	0.29	1.6	17.3	285	326 €	372 €
AFL25-17-P	25	17	0.64	0.7	10.0	355	530 €	595 €
AFL25-20-P	25	20	0.56	0.8	12.6	355	508 €	584 €
AFL25-25-P	25	25	0.48	1.0	17.0	285	486 €	562 €
AFL25-30-P	25	30	0.39	1.2	23.3	285	404 €	469 €
AFL25-40-P	25	40	0.29	1.6	34.6	285	404 €	469 €
AFL25-50-P	25	50	0.23	2.0	45.1	355	404 €	469 €
AFL25-75-P	25	75	0.15	3.0	70.9	355	404 €	469 €
AFL25-100-P	25	100	0.11	4.0	96.3	355	404 €	469 €
AFL50-40-P	50	40	0.56	0.8	25.2	355	786 €	873 €
AFL50-50-P	50	50	0.48	1.0	37.0	355	763 €	853 €
AFL50-60-P	50	60	0.39	1.2	48.3	285	763 €	853 €
AFL50-80-P	50	80	0.29	1.6	70.6	285	763 €	853 €
AFL50-100-P	50	100	0.23	2.0	91.5	355	709 €	820 €

¹ For lenses AFL50-60, AFL50-80, please consider a center thickness tolerance of ±0.1. | ² RMS_f corresponds to ISO 10110-5 (surface form tolerances). | ³ Prices valid per piece. More volume discounts on request. | General: Technical parameters and prices are subject to change without prior notice.



Ultra-precise lenses with outstanding surface form deviation and wavefront RMS.

ULTRA

Surface Form Deviation (RMS) ¹	[μm]	≤0.3
Wavefront RMS	[nm]	≤140

Product Code	Ø	EFL	NA	f/d	WD	λ _{Design}	Prices 1pc ²		Prices Mounted 1pc ³	
							uncoated	coated	uncoated	coated
	[mm]	[mm]			[mm]	[nm]				
AFL12-10-U	12.5	10	0.58	0.833	5.7	355	377 €	420 €	467 €	510 €
AFL12-15-U	12.5	15	0.39	1.2	12.3	285	371 €	415 €	459 €	502 €
AFL12-20-U	12.5	20	0.29	1.6	17.3	285	371 €	415 €	459 €	502 €
AFL25-17-U	25	17	0.64	0.7	10.0	355	568 €	633 €	658 €	756 €
AFL25-20-U	25	20	0.56	0.8	12.6	355	535 €	633 €	630 €	729 €
AFL25-25-U	25	25	0.48	1.0	17.0	285	513 €	611 €	611 €	710 €
AFL25-30-U	25	30	0.39	1.2	23.3	285	469 €	535 €	568 €	633 €
AFL25-40-U	25	40	0.29	1.6	34.6	285	469 €	535 €	568 €	633 €
AFL25-50-U	25	50	0.23	2.0	45.1	355	469 €	535 €	568 €	633 €
AFL25-75-U	25	75	0.15	3.0	70.9	355	469 €	535 €	552 €	633 €
AFL25-100-U	25	100	0.11	4.0	96.3	355	469 €	535 €	568 €	633 €
AFL50-40-U	50	40	0.56	0.8	25.2	355	830 €	917 €	-	-
AFL50-50-U	50	50	0.48	1.0	37.0	355	808 €	895 €	-	-
AFL50-60-U	50	60	0.39	1.2	48.3	285	808 €	895 €	-	-
AFL50-80-U	50	80	0.29	1.6	70.6	285	808 €	895 €	-	-
AFL50-100-U	50	100	0.23	2.0	91.5	355	763 €	896 €	-	-

For lenses AFL50-60, AFL50-80, please consider a center thickness tolerance of ±0.1. | 1 RMS, corresponds to ISO 10110-5. | 2 Prices valid per piece. More volume discounts on request. | 3 Prices valid per piece. More volumes and discounts of coated and uncoated mounted lenses on request. | General: Technical parameters and prices are subject to change without prior notice.




High-end finished optics with lowest roughness of $R_q \leq 0.5$ nm.

BEAMTUNING

Surface Form Deviation (RMS) ¹	[μm]	≤0.02
Wavefront RMS	[nm]	≤10
Surface Roughness (Rq)	[nm]	≤0.5

Product Code	Ø	EFL	NA	f/d	WD	λ _{Design}	Prices 1pc ²		Prices Mounted 1pc ³	
							uncoated	coated	uncoated	coated
	[mm]	[mm]			[mm]	[nm]				
AFL25-50-D	25	50	0.23	2.0	45.1	355	755 €	844 €	848 €	945 €
AFL25-75-D	25	75	0.15	3.0	70.9	355	755 €	844 €	848 €	945 €
AFL25-100-D	25	100	0.11	4.0	96.3	355	755 €	844 €	848 €	945 €

1 RMS, corresponds to ISO 10110-5. | 2 Prices valid per piece. More volume discounts on request. | 3 Prices valid per piece. More volumes and discounts of mounted lenses on request. | General: Technical parameters and prices are subject to change without prior notice.

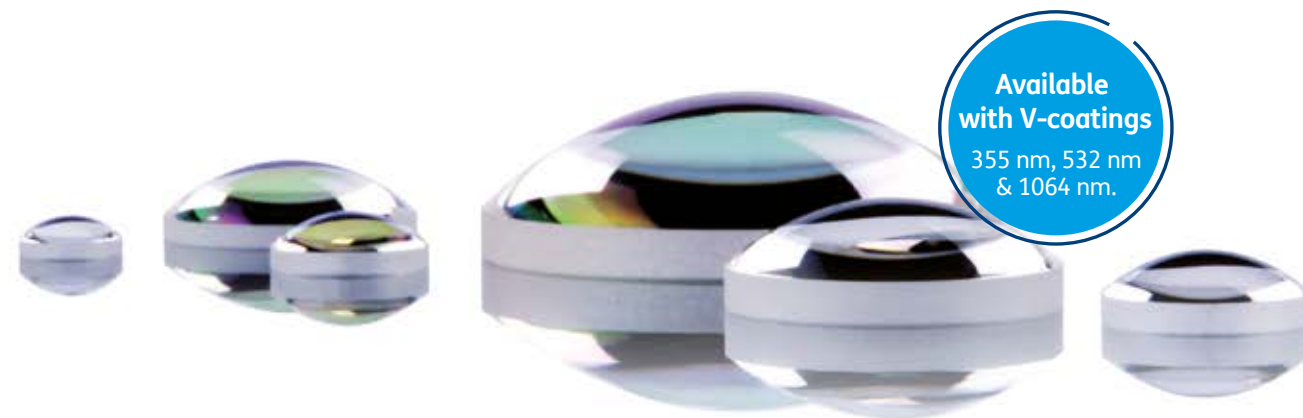

Available
with V-coatings
355 nm, 532 nm
& 1064 nm.

a|Axicons

The premium selection of Axicons boasts superior surface roughness, making them ideal for high-performance applications. a|Axicons are available with a variety of coatings and as mounted optics.

KEY BENEFITS

- = Outstanding surface form deviation of $RMS_s \leq 0.07 \mu m$
- = Laser induced damage threshold: $12 J/cm^2$, 100 Hz, 6 ns, 532 nm
Please request an individual offer for higher laser power
- = RoHS compliance

LENS DESCRIPTION

Surface Form Deviation (RMS) ¹	[μm]	<0.07
Surface Imperfections	[Scratch-Dig]	40-20
Diameter Tolerance	[mm]	+0/-0.1
Center Thickness Tolerance	[mm]	$\pm 0.1/-0$
Clear Aperture	[%]	>90

AR-Coatings²


A: $R_{MAX} < 1.0\%$, 532 nm, AOI=0°
B: $R_{MAX} < 1.0\%$, $R_{AVG} \leq 0.4\%$, 632-780 nm, AOI=0°
C: $R_{MAX} < 1.0\%$, 1064 nm, AOI=0°
E: $R_{MAX} < 1.0\%$, 1500 nm, AOI=0°
F: $R_{MAX} < 1.0\%$, 2000 nm, AOI=0°
X: $R_{MAX} < 1.0\%$, 355 nm, AOI=0°
Y: $R_{MAX} < 1.0\%$, $R_{AVG} \leq 0.4\%$, 320-450 nm, AOI=0°

AR-HighPower-Coatings²

K: $R < 0.25\%$, 355 nm, AOI=0°
L: $R < 0.25\%$, 532 nm, AOI=0°
M: $R < 0.25\%$, 1064 nm, AOI=0°
N: $R < 0.25\%$, 266 nm, AOI=0°
O: $R < 0.25\%$, 632 nm, AOI=0°
P: $R < 0.25\%$, 780 nm, AOI=0°
Q: $R < 0.25\%$, 1550 nm, AOI=0°
R: $R < 0.25\%$, 2000 nm, AOI=0°

Utilizing Axicons

Axicons are conical lenses that are widely used in different scientific research and laser applications.




1. Generation of a Bessel beam.

A - Axicon, L - Lens



2. Generation of a ring beam.



3. Generation of variable ring foci.

Fields of Application

- = Laser material processing
- = Measurement & Alignment
- = Research & Science
- = Medical engineering

Product Code	$\varnothing$ [mm]	Angle [degree]	Edge Thickness [mm]	λ_{Design} [nm]	Material	Prices 1pc ³		Prices 5pc ³		Prices Mounted 1pc ⁴	
						uncoated	coated	uncoated	coated	uncoated	coated
XFL25-005-U ⁵	25.4	0.5	5.0	780	Fused Silica	523 €	630 €	496 €	597 €	624 €	737 €
XFL25-010-U ⁵	25.4	1.0	5.0	780	Fused Silica	523 €	630 €	496 €	597 €	624 €	737 €
XFL25-020-U ⁵	25.4	2.0	5.0	780	Fused Silica	523 €	630 €	496 €	597 €	624 €	737 €
XFL25-050-U ⁵	25.4	5.0	5.0	780	Fused Silica	523 €	630 €	496 €	597 €	624 €	737 €
XFL25-100-U ⁵	25.4	10.0	5.0	780	Fused Silica	523 €	630 €	496 €	597 €	624 €	737 €
XFL25-200-U ⁵	25.4	20.0	5.0	780	Fused Silica	523 €	630 €	496 €	597 €	624 €	737 €
XFL50-005-U ⁶	50.8	0.5	8.0	780	Fused Silica	-	990 €	-	938 €	-	-
XFL50-050-U ⁶	50.8	5.0	8.0	780	Fused Silica	-	990 €	-	938 €	-	-
XFL50-100-U ⁶	50.8	10.0	8.0	780	Fused Silica	-	990 €	-	938 €	-	-

¹ RMS, corresponds to ISO 10110-5 (surface form tolerances). | ² Custom coatings available upon request. | ³ Prices valid per piece. More volume discounts on request. | ⁴ Prices of mounted lenses valid per piece. More volumes and discounts of coated and uncoated mounted lenses on request. | ⁵ Conical tip, Clear Aperture 2.3-23 mm, smaller conical tips on request. | ⁶ Conical tip, Clear Aperture 4.6-46 mm, smaller conical tips on request. | ⁷ Conical tip < 1.0 mm. | General: Technical parameters and prices are subject to change without prior notice.

a|Acylinders

Benefit from our attractive selection of acylinders with a surface form deviation smaller than 0.5 μm .
a|Acylinders are made from high-index-glass and can be especially used for laser applications.

Precise
acylinders
with RMS,
 $\leq 0.5 \mu\text{m}$

KEY BENEFITS

- = Outstanding surface form deviation of RMS, $\leq 0.5 \mu\text{m}$
- = Ideal line-focus without spherical aberration and off-the-shelf delivery for short lead times
- = Available with 3 standard coatings (customized coatings on request)
- = Laser induced damage threshold: 12 J/cm², 100 Hz, 6 ns, 532 nm
For higher laser power applications please request a V-Coating. Contact us for an individual offer.
- = RoHS compliance

LENS DESCRIPTION

Surface Form Deviation (RMS) ¹	[μm]	≤ 0.5
EFL Tolerance	[%]	≤ 0.1
Surface Imperfections	[Scratch-Dig]	60-40
Width Tolerance	[mm]	+0/-0.05
Length Tolerance	[mm]	+/-0.1
Center Thickness Tolerance ²	[mm]	± 0.05
Clear Aperture	[%]	≥ 90

AR-Coatings³

A: R_{MAX} <1.0%, R_{AVG} $\leq 0.4\%$, 400-600 nm, AOI=0°

B: R_{MAX} <1.0%, R_{AVG} $\leq 0.4\%$, 600-1050 nm, AOI=0°

C: R_{MAX} <1.0%, R_{AVG} $\leq 0.4\%$, 1000-1500 nm, AOI=0°



Product Code	Size	EFL	NA	f/d	WD	λ_{Design}	Material	Prices 1pc ⁴		Prices 5pc ⁴	
	[mm]	[mm]			[mm]	[nm]		uncoated	coated	uncoated	coated
CHL10-08-P	10x10	8	0.54	0.8	6.3	780	S-LAH64	317 €	369 €	308 €	358 €
CHL12-10-P	12.5x12.5	10	0.55	0.8	7.2	780	S-LAH64	371 €	423 €	359 €	410 €
CHL15-12-P	15x15	12	0.54	0.8	9.2	780	S-LAH64	397 €	451 €	385 €	437 €
CHL18-15-P	18x18	15	0.53	0.83	11.6	780	S-LAH64	424 €	498 €	411 €	483 €
CHL20-18-P	20x20	18	0.49	0.9	14.3	780	S-LAH64	450 €	524 €	436 €	508 €
CHL25-20-P	25x25	20	0.54	0.8	15.8	780	S-LAH64	477 €	552 €	463 €	535 €
CHL30-26-P	30x30	26	0.52	0.87	21.5	780	S-LAH64	610 €	717 €	591 €	695 €
CHL45-32-P	45x45	32	0.61	0.71	24.7	780	S-LAH64	797 €	1.038 €	773 €	1.006 €
CHL50-40-P	50x50	40	0.55	0.8	32.1	780	S-LAH64	851 €	1.091 €	824 €	1.057 €

1 RMS, corresponds to ISO 10110-5 (surface form tolerances). | 2 For lenses CHL45-32, CHL50-40, please consider a center thickness tolerance of ± 0.1 . | 3 Custom coatings available upon request. | 4 Prices valid per piece. More volume discounts on request. | General: Technical parameters and prices are subject to change without prior notice.

a|MountedAspheres/Axicons

Benefit from a convenient solution for your laser application with the attractive selection of pre-aligned aspheres and axicons from our StockOptics product line in high-precision mountings. All lenses with diameters from 12.5 mm to 25.4 mm are ideally aligned with $< 10 \mu\text{m}$ decentration of the optical and mechanical axis. By using one of the available a|Adapters – SM1, C-Mount, 1.2 inch – the lenses can easily be applied in all standard optical systems.

KEY BENEFITS


- = Especially designed mounts engraved with lens specifications
- = High-precision mounted through using auto-collimation technique
- = Perfect alignment ($< 10 \mu\text{m}$ decentration)
- = Tilt-reduced for optimal focusing
- = Modular design for high compatibility with all asphericon products and common optical systems
- = Comfortable and timesaving handling
- = Easy and safe storage thanks to protective design and safety caps




@ Contact us for more information: sales@asphericon.com

Fields of Application


With especially designed mounts for aspheres, axicons and acylinders an optimized use of the lens is guaranteed. Thanks to harmonized metric fine thread all mounted optical components presented by asphericon can be easily combined.

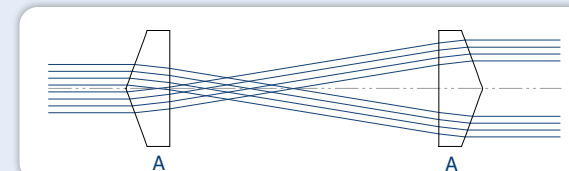


Generation of a collimated ring-shaped beam by altering the distance between two axicons.

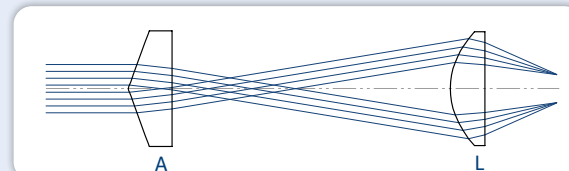


Generation of a ring focus - Distance changing through focal length of the lens, diameter changing through axicon angle.

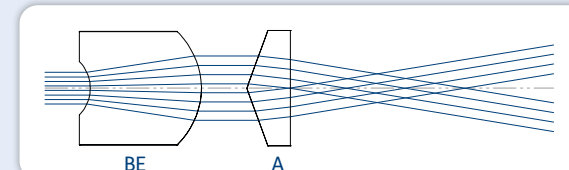


Optimizing the illumination of the axicon to adjust the length of the Bessel Beam.

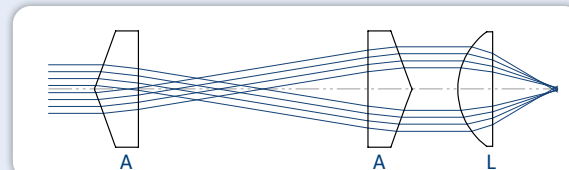

Changing the focal length of a sphere by altering the distance between the axicons.

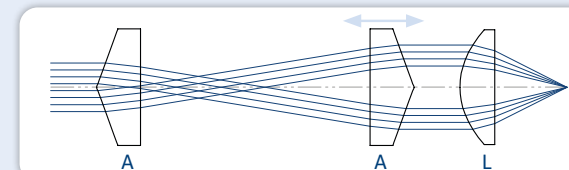

Changing the focus width of an asphere by altering the distance between axicons - Focusing under the diffraction limit.

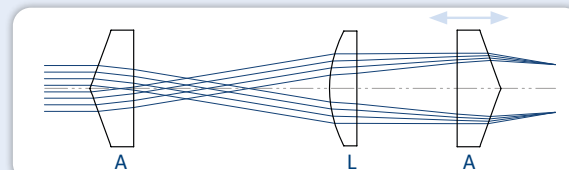

Generation of adjustable ring foci by shifting the last axicon to vary the ring diameters.

A - Axicon, L - Lens, BE - BeamExpander



Visionen leben



**Looking for a
custom solution?**

Contact us:
sales@asphericon.com

asphericon GmbH

Stockholmer Straße 9
D-07747 Jena
Germany

www.asphericon.com

Phone: +49 (0) 3641-31 00 560
Fax: +49 (0) 3641-31 00 561
E-Mail: sales@asphericon.com

asphericon s.r.o.

Milířská 449
CZ-Jeřmanice 463 12
Czech Republic

Phone: +420 488 100 300

E-Mail: sales@asphericon.cz